




Aerial Pullers



AERIAL TOOLS

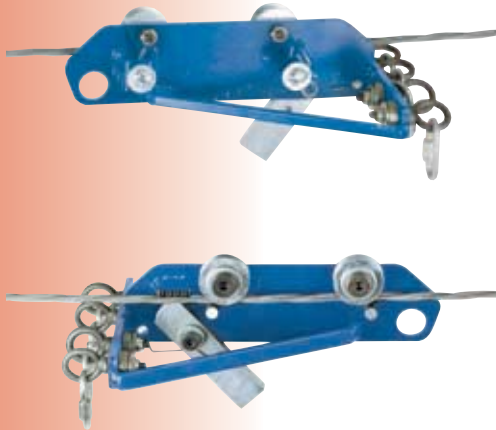

Aerial Cable Puller

Pull multiple cables easily and safely prior to lashing. Cables attach to quick-connect links and pulling eyes that swivel during pulling to avoid tangles and possible cable damage. A spring-loaded strand brake holds the unit in place when pulling is stopped and tension is reduced. The brake releases when tension is increased and pulling is resumed.


Part Number	Description
18108000	Multiple cable puller for 1/4" (6 mm) & 5/16" (8 mm) strand
18108010	Multiple cable puller for 3/8" (8 mm) & 7/8" (10 mm) strand



Overlash Aerial Cable Puller

Designed to pull up to 4 new cables over existing bundles. The Condux Overlash Aerial Cable Puller uses large high-impact plastic rollers that roll easily and safely over existing bundles of up to 2.75" (70 mm) in diameter. Cables attach to quick-connect links and pulling eyes that swivel during pulling to avoid tangles and possible cable damage. Replacement rollers available. See page 18 for ordering information.

Part Number	Description
18308000	Overlash aerial cable puller


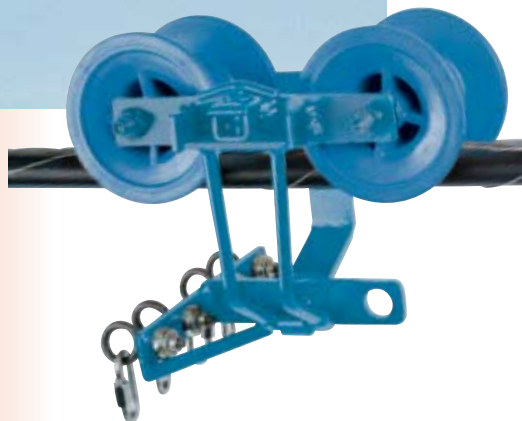




Cable Positioners

Keep multiple cables uniformly positioned in front of the lasher with a Cable Positioner. Three models are available in configurations to accept two, three, or five cables. The five-cable model positions the trunk cables on top, keeping the distribution cables at the bottom of the bundle for easier access later. Fits 1/4" (6 mm) and 5/16" (8 mm) strand.

Part Number	Description	Hole Config. (number)	Maximum Cable Diameter (in) (mm)
18106720	Cable positioner, 2-hole	2	0.75 19
18106730	Cable positioner, 3-hole	3	0.75 19
18106750	Cable positioner, 5-hole	2 (top) 3 (bottom)	1.00 25 0.75 19

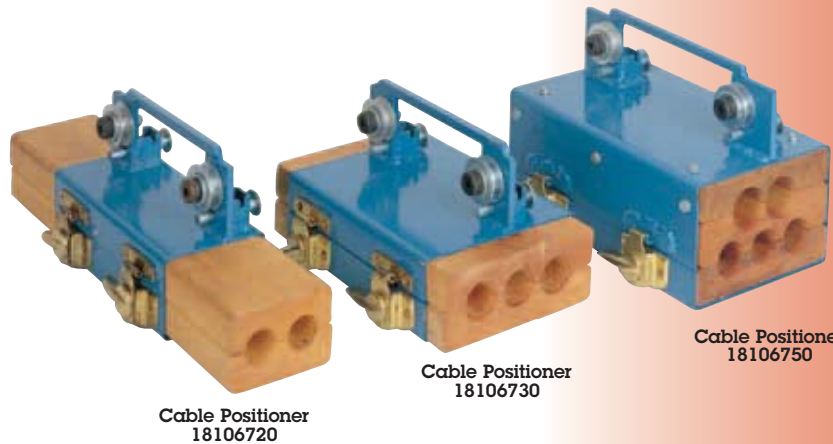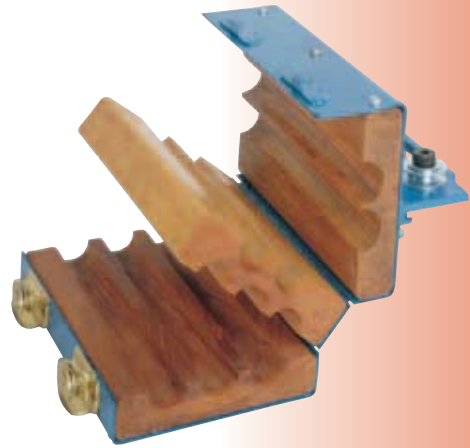

Cable Block Pusher

Non-conductive polyethylene "shotgun" hangs over strand to provide a safe distance between Cable Positioners, Cable Blocks, and Cable Lasher during lashing operations. Available in 20" (508 mm) and 40" (1,016 mm) lengths.

Part Number	Description
18109220	20" (508 mm) Cable block pusher
18109240	40" (1,016 mm) Cable block pusher

